


KS28 SUBWOOFER



| | |
|-------------------------------------|---|
| Description | High power subwoofer: 2 x 18" amplified by LA12X |
| Low frequency limit (-10 dB) | 25 Hz ([KS28_100]) |
| Maximum SPL¹ | 143 dB ([KS28_100]) |
| Directivity | Standard or cardioid |
| Transducers | 2 x 18" neodymium, aluminium die cast basket |
| Acoustical load | Bass-reflex enclosure, L-Vents |
| Nominal impedance | 4 Ω |
| Connectors | IN: 4-point speakON® |
| Rigging and handling | Flush-fitting 2-point rigging system 6 ergonomic handles 2 ground runners 8 side runners |
| Weight (net) | 79 kg / 174 lbs |
| Cabinet | Premium grade beech and birch plywood |
| Front | Steel grill with anti-corrosion coating Acoustically neutral 3D fabric |
| Rigging components | High grade steel with anti-corrosion coating |
| Finish | Dark grey brown PANTONE® 426 C |
| IP | IP55 |

¹ Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

ISOCONTOUR

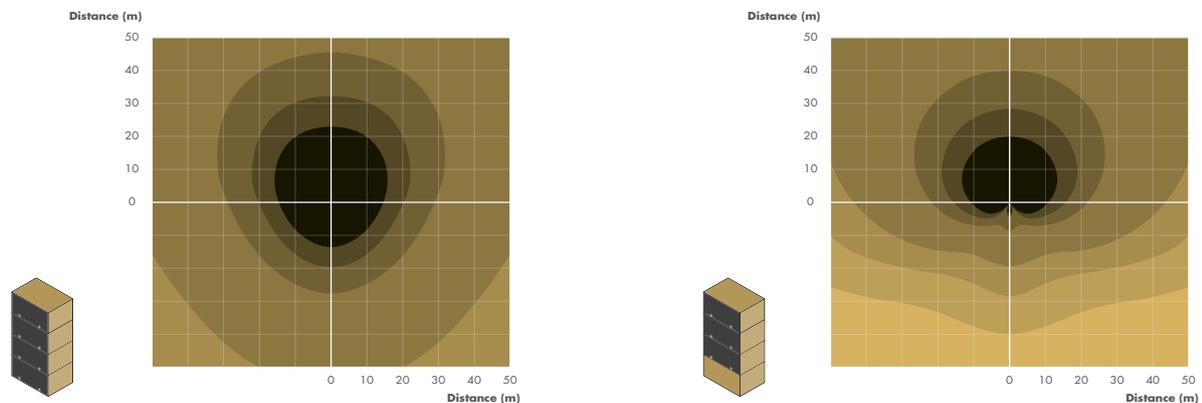

► SPL mapping of a block of four KS28 in standard (left) and cardioid (right) arrangements, using surfaces of equal sound pressure with three dB step colored scale.

DIMENSIONS

